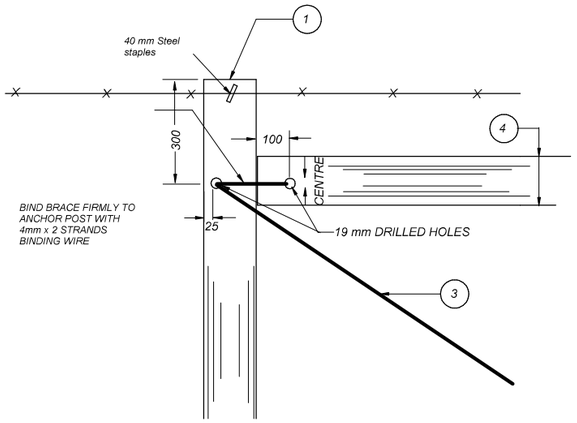

DETAIL A

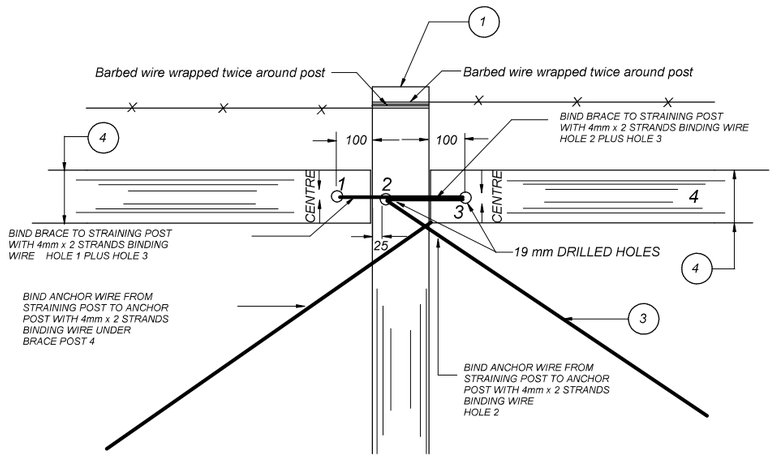

DETAIL B

LEGEND

1

125 - 150mm TOP DIAMETER x 2100 mm TREATED TIMBER POST CORNER, STRAINING AND ANCHOR POSTS

3

4mm x 4 STRANDS TWISTED SOFT GALVANISED BINDING WIRE

4

100 - 125mm TOP DIAMETER x 1800 mm TREATED TIMBER POST BRACES IN BOX ANCHORS

NOTES:

1. 40 mm STAPLES REQUIRED FOR CORNER POSTS and STRAINING POSTS

2. THIS DRAWING TO BE READ IN CONJUNCTION WITH THE PROJECT PARTICULAR SPECIFICATIONS FOR FENCES

NGL NATURAL GROUND LEVEL

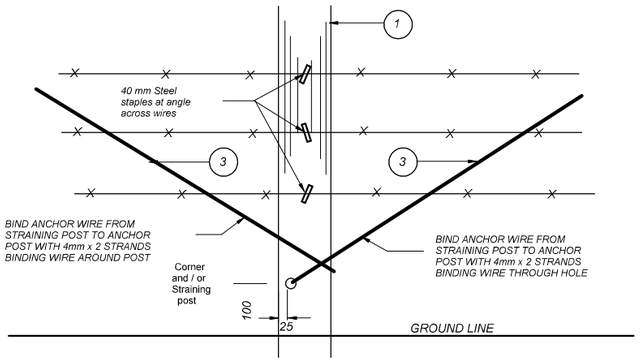

DETAIL C

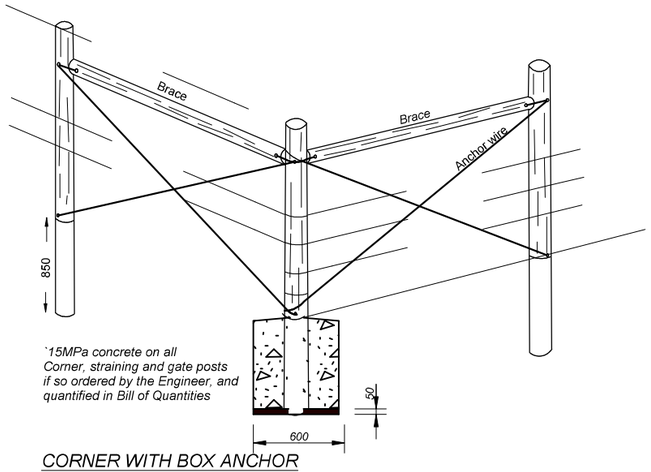

CORNER WITH BOX ANCHOR

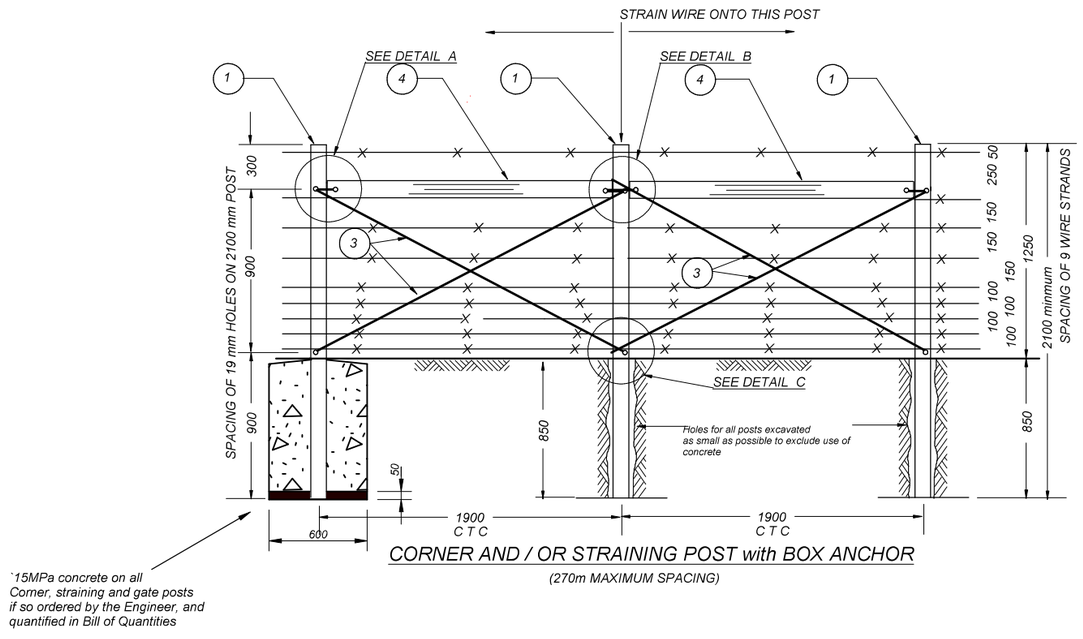

CORNER AND / OR STRAINING POST with BOX ANCHOR

(270m MAXIMUM SPACING)

NO.	SPECIAL NOTES:				
		S KONDLO (CHIEF ENGINEER)	**DEPARTMENT OF RURAL DEVELOPMENT AND AGRARIAN REFORM PROVINCE OF THE EASTERN CAPE**	**STANDARD STOCK PROOF FENCE**	SCALE NTS / INDEX NO. SCMM-03/19/01
		OCTOBER 2024 (DATE APPROVED)	ENGINEERING SERVICES PRIVATE BAG X015 DOHNE ADI STUTTERHEIM 4930	**1,2m HIGH - 9 STRAND FENCE**	A3 ORIGINAL / PLAN NO. SHEET 1 OF 6